




KHAI NGUYEN

KẾT NỐI VỮNG BỀN

DIN 127

HELICAL SPRING LOCK WASHER

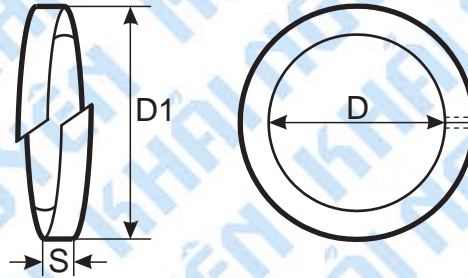

FOR SCREW Ø		D	D1 MAX	B	S	WEIGHT IN KG PER 1000 PIECES	PACK
METR.	WW						
M2		2.1 + 0.3	4.4	0.9 ± 0.1	0.5 ± 0.1	0.03	100
M2.5		2.6 + 0.3	5.1	1 ± 0.1	0.6 ± 0.1	0.05	
M3		3.1 + 0.3	6.2	1.3 ± 0.1	0.8 ± 0.1	0.11	
M3.5	1/8	3.6 + 0.3	6.7	1.3 ± 0.1	0.8 ± 0.1	0.12	500
M4	5/32	4.1 + 0.3	7.6	1.5 ± 0.1	0.9 ± 0.1	0.18	
M5	3/16	5.1 + 0.3	9.2	1.8 ± 0.1	1.2 ± 0.1	0.36	
M6		6.1 + 0.4	11.8	2.5 ± 0.15	1.6 ± 0.1	0.83	
	1/4						
M7	5/16	6.5 + 0.4	12.2	2.5 ± 0.15	1.6 ± 0.1	0.93	
M8	3/8	7.1 + 0.4	12.8	2.5 ± 0.15	1.6 ± 0.1	0.93	
M10	7/16	8.1 + 0.4	14.8	3 ± 0.15	2 ± 0.1	1.60	200
		10.2 + 0.5	18.1	3.5 ± 0.2	2.2 ± 0.15	2.53	
M12		11.3 + 0.5	19.2	3.5 ± 0.2	2.2 ± 0.15	3.00	100
		12.2 + 0.5	21.1	4 ± 0.2	2.5 ± 0.15	3.82	
		13 + 0.5	21.9	4 ± 0.2	2.5 ± 0.15	3.95	
M14	5/8	14.2 + 0.5	24.1	4.5 ± 0.2	3 ± 0.15	6.01	50
M16	3/4	16.2 + 0.8	27.4	5 ± 0.2	3.5 ± 0.2	8.91	
M18	7/8	18.2 + 0.8	29.4	5 ± 0.2	3.5 ± 0.2	9.73	
M20		20.2 + 1	33.6	6 ± 0.2	4 ± 0.2	15.2	
M2		22.5 + 1	35.9	6 ± 0.2	4 ± 0.2	16.5	
M24	1	24.5 + 1	40	7 ± 0.25	5 ± 0.2	26.2	25
	1 1/8	26.5 + 1	42	7 ± 0.25	5 ± 0.2	27.45	
M27		27.5 + 1	43	7 ± 0.25	5 ± 0.2	28.7	
M30	1 1/4	30.5 + 1	48.2	8 ± 0.25	6 ± 0.2	44.3	
	1 1/2	32.5 + 1.2	50.2	8 ± 0.25	6 ± 0.2	44.3	75
M33	1 5/8	33.5 + 1.2	55.2	10 ± 0.25	6 ± 0.2	63.0	
M36	1 3/4	36.5 + 1.2	58.2	10 ± 0.25	6 ± 0.2	67.3	
M39		39.5 + 1.2	61.2	10 ± 0.25	6 ± 0.2	71.7	100
M42		45.5 + 1.2	68.2	12 ± 0.25	7 ± 0.25	111	
M45		45.5 + 1.2	71.2	12 ± 0.25	7 ± 0.25	117	
M48		49 + 1.5	75	12 ± 0.25	7 ± 0.25	123	150
M50		51 + 1.5	77	12 ± 0.25	7 ± 0.25	152	
M52		59 + 1.5	83	8 ± 0.25	8 ± 0.25	192	